

1. General Specification




| | | |
|----|-------------------|--|
| 1 | Model No. | Mirage-H 92x92x25 |
| 2 | Dimension of fan | 92*92*25MM |
| 3 | Voltage | 12V (10.8-13.2V) |
| 4 | Starting voltage | 7.0V (POWER ON/OFF) |
| 5 | Power consumption | 2.4W |
| 6 | Rated current | 0.20A(Safety) |
| 7 | Speed | 1,800±10%R.P.M. At 25℃,After 3~5 minutes rotating (Fan alone). |
| 8 | Max air flow | 31.97CFM |
| 9 | Air Pressure | 1.6mm-H ₂ O |
| 10 | Noise | 22 dBA |

2. Main Parts Specification

| | | |
|---|---------------------|--|
| 1 | Fan Blade & Frame | PBT BLACK |
| 2 | Bearing | Hydraulic Bearing |
| 3 | P.C.B | One layer PC Board |
| 4 | Enameled Wire | 2UEW |
| 5 | Silicon Steel Strip | H23 |
| 6 | Lead Wire | UL2468 26AWG L=400±10MM (-)BLACK (+)RED (FG)YELLOW |
| 7 | Connector | 2510-3P |

3. Electrical and Environmental Specification

| | | |
|---|-----------------------|---|
| 1 | Expected Life | 40,000 hrs,25℃ |
| 2 | Rotating Direction | Anti-Clockwise |
| 3 | No. of pole | 4Poles |
| 4 | Operating Temp .Range | Temperature:-10℃~+70℃ Humidity:35%~85%RH |
| 5 | Store Temperature | Temperature:-40℃~+70℃ Humidity:35%~85%RH |

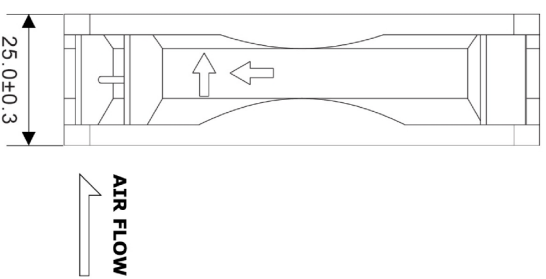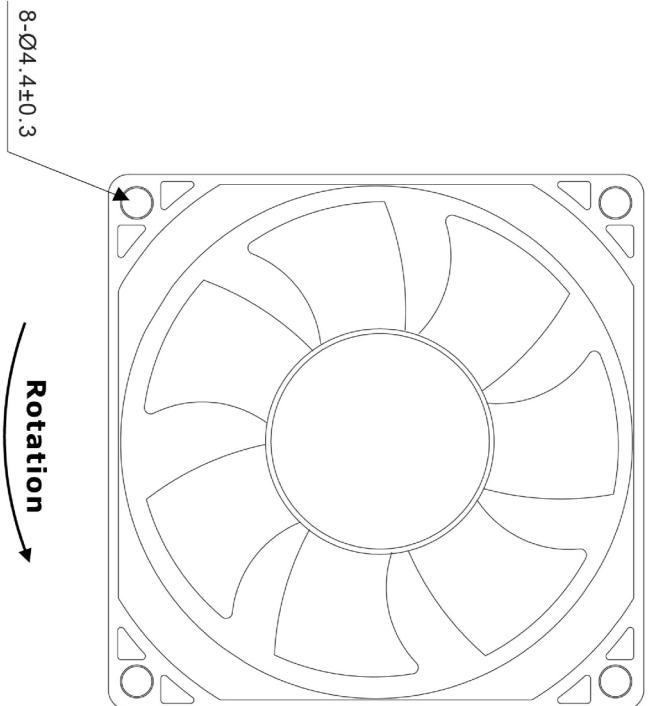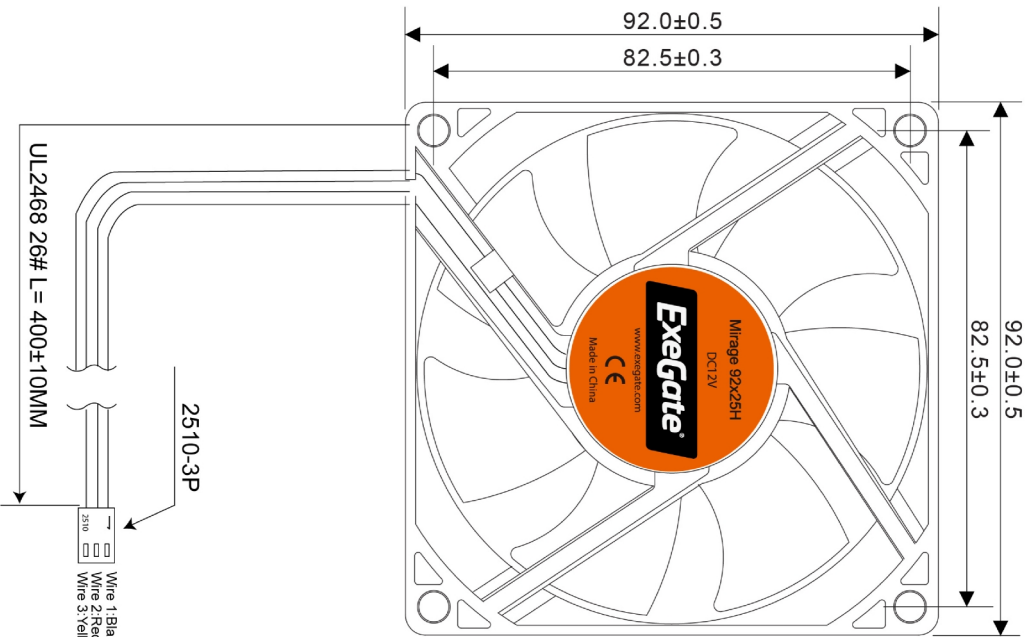

Unit: (mm)

| | |
|----------------|-----------------------|
| Voltage | 12 V |
| Safety Current | 0.20 A |
| Bearing | Hydraulic bearing |
| Speed | 2,000±10%/RPM |
| Connector | 2510-3P |
| Wire 1 | BLACK(-) 26# UL2468 |
| Wire 2 | RED(+) 26# UL2468 |
| Wire 3 | YELLOW(FG) 26# UL2468 |